


MBV10 Aluminium

Aluminium Diaphragm Pump



EMOCLEW AMERICA



Diaphragm Pump

MBV10 Aluminium

Aluminium Diaphragm Pump



Hot MBV10 Aluminium – Emoclew America is the best MBV10 Aluminium supplier in USA.

Description

Features

- 3/8 in (9.52 mm) end-porting
- Fully-groundable acetal model
- Delivery up to 7 gpm (26.5 lpm)
- Operates on as little as 12 psi (0.8 bar, 0.08 MPa) air pressure
- Quiet operation

- On-demand batch chemical metering
- Low viscosity adhesive supply
- Consistent low pressure air spray or HVLP supply

Typical Fluids Handled

Typical Applications


- Drum transfer for fluids up to 1000 centipoise
- Circulation of low viscosity inks, stains and dyes
- Coolant circulation and evacuation
- Waste fluid removal

- Paints
- Lubricants
- Inks
- Stains
- Solvents
- Coatings
- Dyes


Parameter Table

MBV10 Aluminium - Technical Specifications	
Max Working Pressure	100psi(0.7Mpa ,7bar)
Max Flow Rate	10.5gpm(38lpm)
Max Reciprocating Speed	330cpm
Max Suction Height (Dry Sucking)	Dry3.7m; Wet6.4m
Max Permitted Grain	1/16in.(1.6mm)
Max.Air Consumption	18scfm(9L/s)
Air Inlet size	1/4in.npt(f)
Air Outlet size	1/4in.npt(f)
Fluid Inlet size	3/8in.npt(f)
Fluid Outlet size	3/8in.npt(f)
Weight	Aluminum pump 3.9kg

Diagram

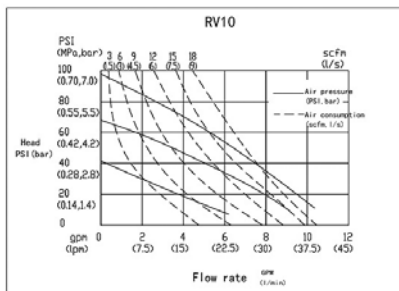

Installation

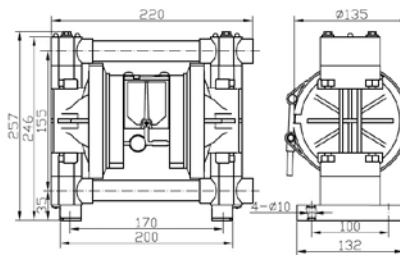

EMOCLEW AMERICA COMPANY LLC

7901 Kingspointe PKWY SUITE 28 - Orlando - FL - 32819 - USA

+1 (407) 683-6437

emoclew@emoclewusa.com | info@emoclewpumps.com | www.emoclew.com