


MBV25 PVDF Plastic Center Block Pump

Plastic Center Block Pump



EMOCLEW AMERICA



Diaphragm Pump

MBV25 PVDF Plastic Center Block Pump

Plastic Center Block Pump



As a specialist of MBV25 PVDF Plastic Center Block Pump, Emoclew America can offer you comprehensive selections of goods in this industry.

Description

Features

- 1 in (25.4 mm) end-porting
- High flow – 40 gpm (151 lpm) in a compact, portable size
- Fluid pressure to 120 psi (8.4 bar, 0.84 MPa)
- Epoxy-coated center section
- External controller for optional remote operation

Typical Applications

- Drum fluid transfer
- Unloading fluids
- Transferring high temperature acids
- Chemical evacuation

- Tank and sump drainage
- Circulating plating chemical tank


Typical Fluids Handled

- Chemicals
- Acetic acid
- Chromic acid
- Hydrochloric acid
- Hydrofluoric acid
- Sulfuric acid
- Nitric acid
- Phosphoric acid


Parameter Table

MBV25 PVDF Plastic Center Block Pump - Technical Specifications	
Max Working Pressure	120psi(0.84Mpa ,8.4bar)
Max Flow Rate	40 gpm(150 lpm)
Max Reciprocating Speed	276cpm
Max Suction Height (Dry Sucking)	5.48m
Max Permitted Grain	4mm
Max.Air Consumption	45scfm(22.5L/s)
Air Inlet size	1/2 in.npt(f)
Air Outlet size	1/2 in.npt(f)
Fluid Inlet size	1 in.npt(f)
Fluid Outlet size	1 in.npt(f)
Weight	PVDF Pump 10.0kg PP pump 8.0kg

Diagram

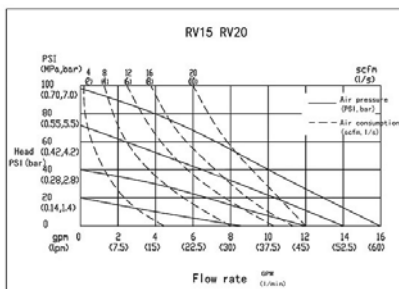

Installation

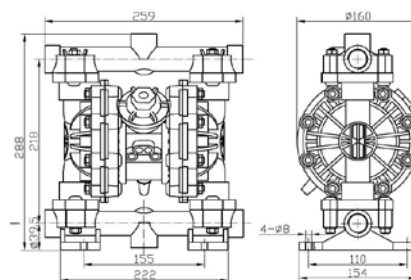

EMOCLEW AMERICA COMPANY LLC

7901 Kingspointe PKWY SUITE 28 - Orlando - FL - 32819 - USA

+1 (407) 683-6437

emoclew@emoclewusa.com | info@emoclewpumps.com | www.emoclew.com