


# MBV40 Diaphragm Pump Ductile Iron

Stainless Steel Center Block Pump



EMOCLEW AMERICA



Diaphragm Pump

# MBV40 Diaphragm Pump Ductile Iron

## Stainless Steel Center Block Pump



Quality MBV40 Diaphragm Pump Ductile Iron suppliers & exporter – all products made in USA.

## Description

### Features

- 1-1/2 in (38.1 mm) end-porting
- High flow – 100 gpm (378 lpm) in a compact, portable size
- Fluid pressure to 120 psi (8.4 bar, 0.84 MPa)
- Patented, high-reliability closed center air valve is online serviceable
- Lube-free operation
- Epoxy-coated air section
- External controller for optional remote operation

### Typical Applications

- Filter press
- Tank stripping
- Bilge pumping
- Sand and ball mill pumping
- Oil transfer and oil skimming
- Chemical plating


### Typical Fluids Handled

- Latex
- Abrasive fluids
- Slurries: petroleum, lime, clay, ferrite, salt/brine and pumice
- Sludge: secondary and clarifier
- Pottery slip


## Parameter Table

MBV40 Diaphragm Pump Ductile Iron - Technical Specifications	
Max Working Pressure	120psi(0.84Mpa ,8.4bar)
Max Flow Rate	118 gpm(446 lpm)
Max Reciprocating Speed	200cpm
Max Suction Height (Dry Sucking)	5m
Max Permitted Grain	5mm
Max. Air Consumption	80scfm(40L/s)
Air Inlet size	1/2 in.npt(f)
Air Outlet size	1/2 in.npt(f)
Fluid Inlet size	1 1/2 in.npt(f)
Fluid Outlet size	1 1/2 in.npt(f)
Weight	Aluminum pump 16kg; Stainless steel 29.0kg Ductile Iron 33kg

## Diagram

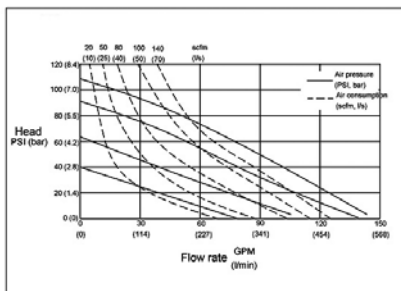

## Installation

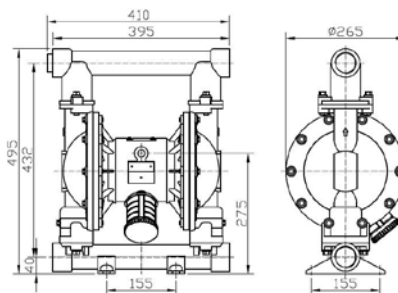

### EMOCLEW AMERICA COMPANY LLC

7901 Kingspointe PKWY SUITE 28 - Orlando - FL - 32819 - USA

+1 (407) 683-6437

emoclew@emoclewusa.com | info@emoclewpumps.com | www.emoclew.com