


# MBV80 Aluminium Diaphragm Pump

Aluminium Diaphragm Pump



EMOCLEW AMERICA



Diaphragm Pump

# MBV80 Aluminium Diaphragm Pump

## Aluminium Diaphragm Pump



You can buy good quality MBV80 Aluminium Diaphragm Pump, we are the best distributor from USA market.

### Description

#### Features

- 3 in (76.2 mm) ANSI center-porting that is internally threaded 3 npt or bspt
- Bolted leak-free, flanged connections — no clamp bands used
- Large flow paths for high viscosities
- Easy air valve maintenance
- Heavy-duty construction
- Fluid flow up to 275 gpm (1040 lpm)

#### Typical Applications

- Chemical transfers
- Filter press-feed
- Dewatering


#### Typical Fluids Handled

- Chemicals
- Bulk paint resins
- Ceramic slip


### Parameter Table

MBV80 Aluminium Diaphragm Pump - Technical Specifications	
Max Working Pressure	120psi(0.84Mpa ,8.4bar)
Max Flow Rate	275 gpm(1041 lpm)
Max reciprocating Speed	135cpm
Max.Suction Height (Dry Sucking)	5m
Max.permitted Grain	9.4mm
Max Air Consumption	180scfm(90L/s)
Air Inlet size	3/4 in.npt(f)
Air Outlet size	1 in.npt(f)
Fluid Inlet size	3 in.npt(f)
Fluid Outlet size	3 in.npt(f)
Weight	Aluminum pump 77kg; Stainless steel 110.0kg; Ductile Iton 180kg

### Diagram

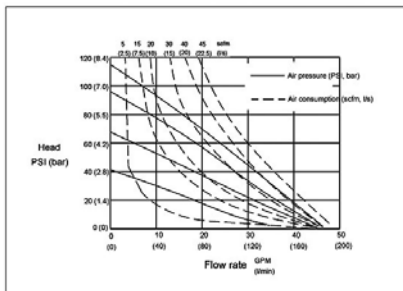

### Installation

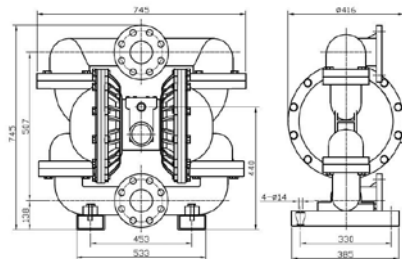

#### EMOCLEW AMERICA COMPANY LLC

7901 Kingspointe PKWY SUITE 28 - Orlando - FL - 32819 - USA

+1 (407) 683-6437

emoclew@emoclewusa.com | info@emoclewpumps.com | www.emoclew.com