


# MBV15 PVDF Plastic Center Block Pump

Plastic Center Block Pump



EMOCLEW AMERICA



Diaphragm Pump

# MBV15 PVDF Plastic Center Block Pump

## Plastic Center Block Pump

Before shipping, Emoclew America MBV15 PVDF Plastic Center Block Pump are packed with strong wooden case with waterproof cloth to avoid any damage.



## Description

### Features

- 1/2 in (12.7 mm) center- and end-porting
- No seals to leak or fail
- Quiet running — less than 85 dB with easy-to-use remote muffler capability for even lower noise levels
- High flow rates in a small, portable package
- External controller for optional remote operation

### Typical Applications

- Machine lubrication servicing
- Drum evacuation
- Plating and dip tanks
- Water treatment


### Typical Fluids Handled

- Cleaning fluids and detergents
- Chemicals
- Ceramic glazes
- Inks
- Solvents and flammables
- Acids and bases


## Parameter Table

MBV15 PVDF Plastic Center Block Pump - Technical Specifications	
Max Working Pressure	100psi(0.7Mpa , 7bar)
Max Flow Rate	15gpm(57lpm)
Max Reciprocating Speed	400cpm
Max Suction Height (Dry Sucking)	4.5m
Max Permitted Grain	3/32in.(2.5mm)
Max.Air Consumption	20gpm(10L/s)
Air Inlet size	1/4in.npt(f)
Air Outlet size	3/8in.npt(f)
Fluid Inlet size	1/2 in.npt(f)or bspt(f)
Fluid Outlet size	1/2 in.npt(f)or bspt(f)
Weight	PVDF pump 3.7kg PP pump 2.7kg

## Diagram

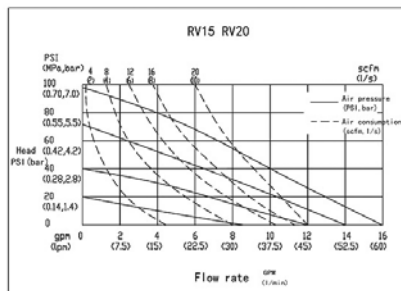

## Installation

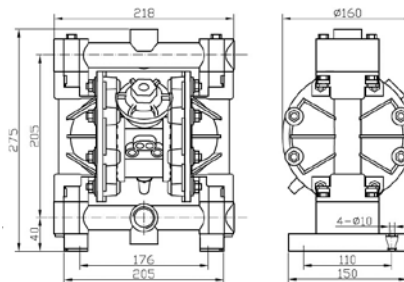

## EMOCLEW AMERICA COMPANY LLC

7901 Kingspointe PKWY SUITE 28 - Orlando - FL - 32819 - USA

+1 (407) 683-6437

emoclew@emoclewusa.com | info@emoclewpumps.com | www.emoclew.com